


# Adjustable lifting beam RBC

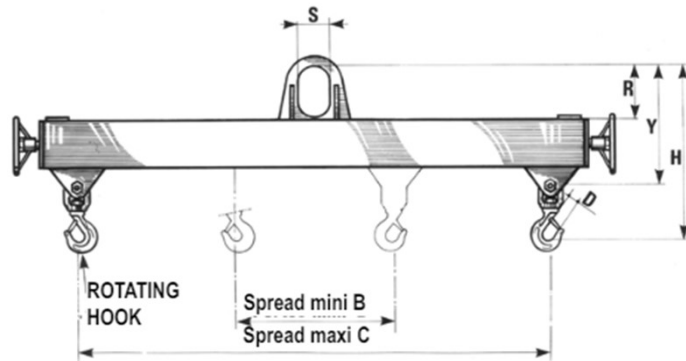

- Fast balancing of loads
- Spread continuously adjustable (2 independant screws).
- Double central beam making a box
- Hooks allowing slings with an angle of max 45°
- Safety coefficient 6
- Special models and capacity (force) on request.

| SWL kg | Spreads B / C mm | R mm | S mm | H mm  | D mm | Mass kg | SAPEM code |
|--------|------------------|------|------|-------|------|---------|------------|
| 1 000  | 500 / 1 000      | 170  | 120  | 420   | 17   | 45      | 9057A      |
|        | 500 / 1 500      |      |      | 440   |      | 60      | 9057B      |
| 2 000  | 500 / 1 000      | 170  | 120  | 480   | 22   | 65      | 9057C      |
|        | 550 / 1 500      |      |      | 500   |      | 100     | 9057D      |
|        | 600 / 2 000      |      |      | 520   |      | 125     | 9057E      |
| 3 000  | 600 / 1 000      | 215  | 150  | 570   | 24   | 100     | 9057F      |
|        | 650 / 1 500      |      |      | 590   |      | 135     | 9057G      |
|        | 700 / 2 000      |      |      | 610   |      | 170     | 9057H      |
|        | 800 / 3 000      |      |      | 720   |      | 260     | 9057J      |
| 4 000  | 650 / 1 500      | 215  | 150  | 650   | 28   | 190     | 9057K      |
| 5 000  | 700 / 1 500      |      |      | 730   | 36   | 210     | 9057L      |
|        | 800 / 2 000      | 750  | 240  | 9057M |      |         |            |
|        | 900 / 3 000      | 890  | 400  | 9057N |      |         |            |

*Note: Equipment meeting the essential requirements of European Directive 2006/42/CE and Standard NF EN 13155. Supplied with "CE" certificate of conformity.*