


# Lashing lugs ARA

Patented

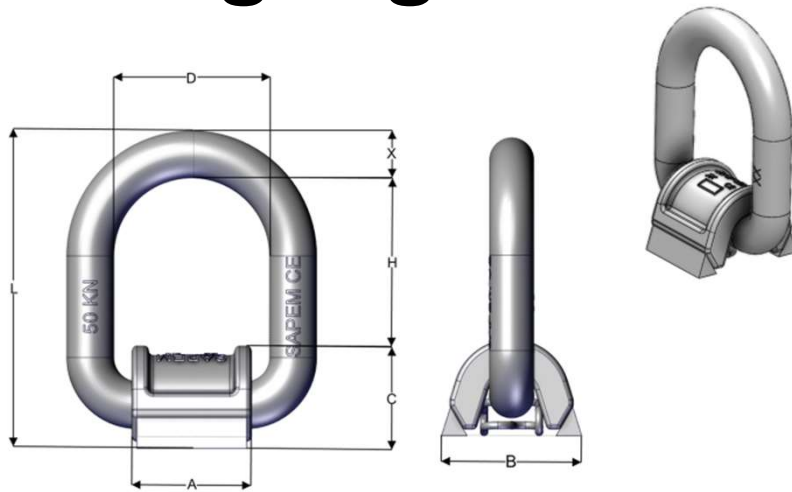

- Meets STANAG 3548
- With stainless steel spring (patented) to maintain in position.
- Welding on the structure without pre-heating.
- Withstands nominal load without permanent deformation, regardless of the orientation of the lashing force.
- Welding on the structure without pre-heating.
- Certified resilience at  $-40^{\circ}\text{C}$

	Code Sapem	Capacity (kN)	Mass (kg)	Dimension (mm)						
				A	B	C	D	H	L	X
N°2	322B	50	1,2	50	80	42	65	70	132	20
N°3	322C	120	2,4	70	95	52	80	80	157	25