
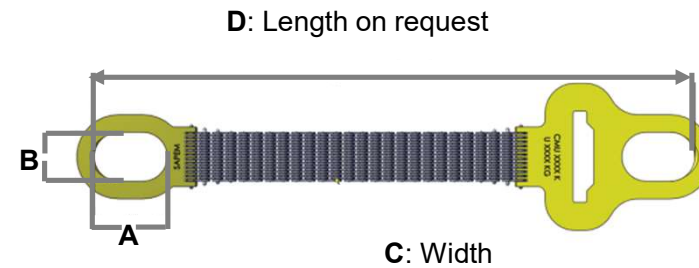


# Flat slings with steel links Type PZK

With simple end fittings: Code 422

With sliding end fittings: Code 428

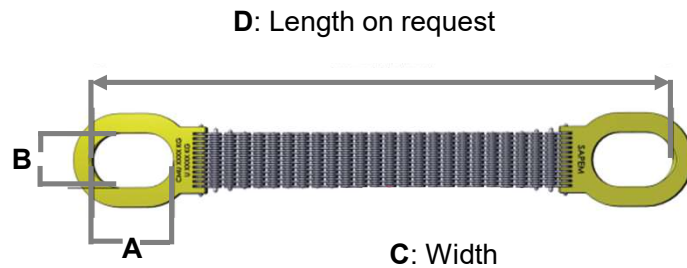

Working load on 1 end, kg	Working load on 2 ends, kg	A mm	B mm	Width C of sling, mm	Length L m	Type	Mass of additional meter kg	with 2 simple end fittings		with 1 simple end fitting and 1 sliding end fitting	
								Mass kg	SAPEM code	Mass kg	SAPEM code
3 000	6 000	105	70	45	2	PZK 6	4.6	19	422A	22	428A
4 000	8 000	120	80	55	3	PZK 8	6	23	422B	27	428B
5 000	10 000	120	80	70	3	PZK 10	7.4	27	422C	31	428C
7 500	15 000	150	100	105	3	PZK 15	11	43	422D	48	428D
10 000	20 000	180	120	140	4	PZK 20	14	70	422E	75	428E
12 500	25 000	200	135	175	4	PZK 25	5	89	422F	93	428F
15 000	30 000	225	150	210	4	PZK 30	18	108	422G	112	428G

- **Safety coefficient: 6**
- **Do not deform**
- **On request:**
  - Test at twice the nominal load, by an approved lab

*Note: Use and restrictions of use according to the instructions note NI 10057;  
Equipment meeting the essential requirements of European Directive 2006/42/CE. Supplied with "CE" certificate of conformity.*