


Adjustable lifting beam RAC

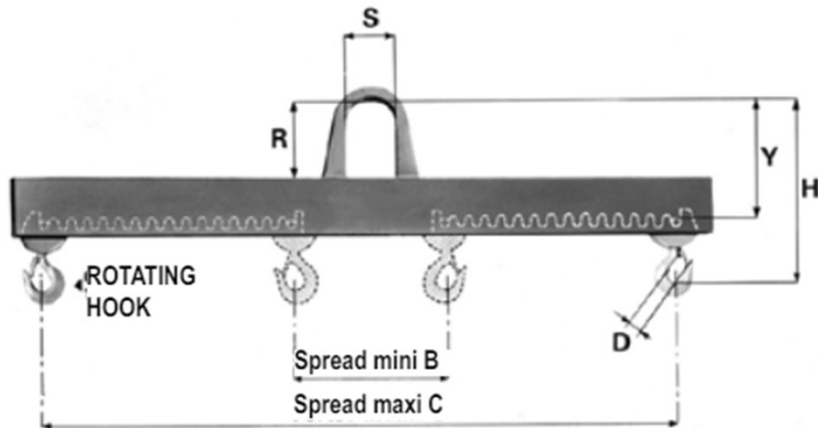

- Fast balancing of loads
- Spread adjustable stepwise.
- Double central beam making a box
- Hooks allowing slings with an angle of max 45°
- Safety coefficient: 6
- Special models and capacity (force) on request.

SWL kg	Spreads B / C mm	R mm	S mm	H mm	D	Mass kg	Pitch mm	SAPEM code
1 000	475 / 1 000	170	120	340	17	40	37.5	9053A
	450 / 1 500			360		50		9053B
2 000	460 / 1 000	170	120	380	22	45	45	9053C
	420 / 1 500			400		65		9053D
	470 / 2 000			420		95		9053E
3 000	580 / 1 000	215	150	470	24	50	52.5	9053F
	555 / 1 500			490		75		9053G
	530 / 2 000	290		510		115		9053H
	585 / 3 000			620		220		9053J
4 000	660 / 1 500	215	150	530	28	110	9053K	
5 000	750 / 1 500			290	580	36	110	9053L
	750 / 2 000	600			170		62.5	9053M
	750 / 3 000	710			300		9053N	

Note: Equipment meeting the essential requirements of European Directive 2006/42/CE and Standard NF EN 13155. Supplied with "CE" certificate of conformity.