
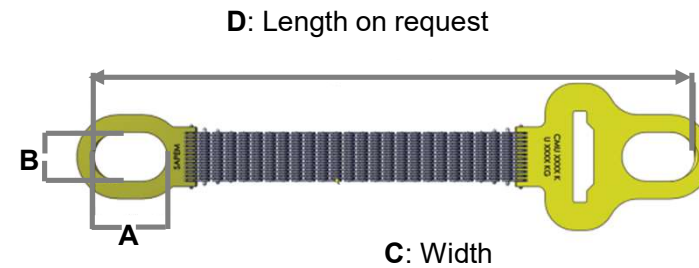


Flat slings with stainless steel links Type PZI

With simple end fittings: Code 429

With sliding end fittings: Code 430

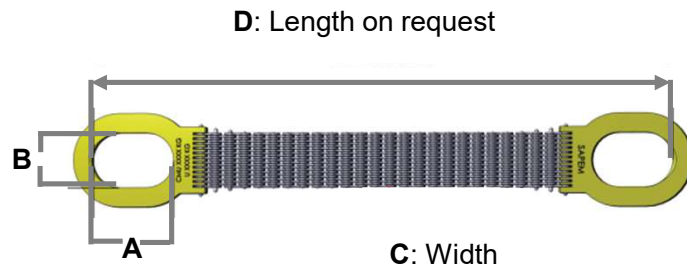

Working load on 1 end, kg	Working load on 2 ends, kg	A mm	B mm	Width C of sling, mm	Length L m	Type	Mass of additional meter kg	with 2 simple end fittings		with 1 simple end fitting and 1 sliding end fitting	
								Mass kg	SAPEM code	Mass kg	SAPEM code
900	1 800	75	50	34	1	PZI 6	2.25	3	429A	4.2	430A
1 200	2 400	75	50	43	1	PZI 8	3	3.6	429B	5	430B
1 500	3 000	75	50	51	1	PZI 10	3.6	4.5	429C	6	430C
1 800	3 600	90	60	60	2	PZI 12	4.3	10	429D	11.7	430D
2 100	4 200	90	60	69	2	PZI 14	5	12	429E	14	430E
2 400	4 800	105	70	78	2	PZI 16	5.7	13	429F	15	430F
3 000	6 000	105	70	95	2	PZI 20	7	17	429G	20	430G
3 750	7 500	120	80	117	3	PZI 25	8.8	29	429H	33	430H
4 500	9 000	120	80	139	3	PZI 30	10.5	34	429J	40	430J
6 000	12 000	150	100	183	3	PZI 40	14	46	429K	56	430K

- **Safety coefficient: 6**
- **Do not deform**
- **On request:**
 - test at twice the nominal load, by an approved lab

Note: Use and restrictions of use according to the instructions note NI 10057; Equipment meeting the essential requirements of European Directive 2006/42/CE. Supplied with "CE" certificate of conformity.