
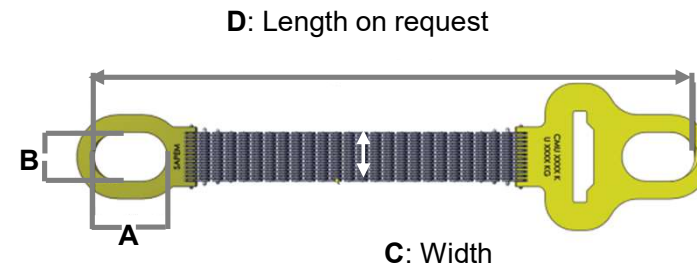


# Flat slings with steel links Type PZR

With simple fittings: Code 421

With sliding fittings: Code 427

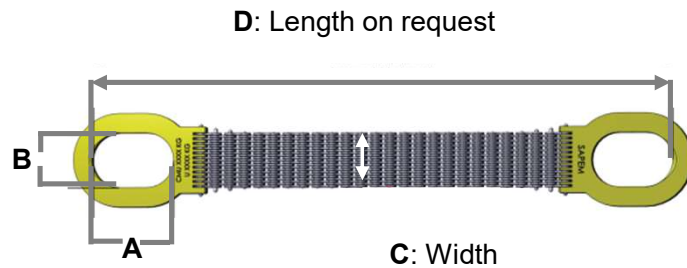

Working load on 1 end, kg	Working load on 2 ends, kg	A mm	B mm	Width C of sling, mm	Length L m	Type	Mass of additional meter kg	with 2 simple end fittings		with 1 simple end fitting and 1 sliding end fitting	
								Mass kg	SAPEM code	Mass kg	SAPEM code
1 500	3 000	75	55	36	1	PZR 6	2.3	4	421B	5	427B
2 000	4 000	90	60	46	2	PZR 8	3.1	8	421C	11	427C
3 000	6 000	105	70	66	2	PZR 12	4.6	12	421D	14	427D
*4 000	*8 000	120	80	86	3	PZR 16	6.1	23	421E	28	427E
*5 000	*10 000	120	80	106	3	PZR 20	7.6	27	421F	31	427F
*7 500	*15 000	150	100	156	3	PZR 30	11.4	44	421G	49	427G

- **Safety coefficient: 6**
- **Do not deform**
- It is advisable, for heavy loads, to use PZK slings. These are narrower and more robust
- **On request:**
  - Test at twice the nominal load, by an approved lab

*Note: Use and restrictions of use according to the instructions note NI 10057;  
Equipment meeting the essential requirements of European Directive 2006/42/CE. Supplied with "CE" certificate of conformity.*