



Flat slings with aluminum links Type PAL

Flat sling made of aluminium – wide contact area for fragile loads:

Flat Sling with simple end fittings: Code 1419

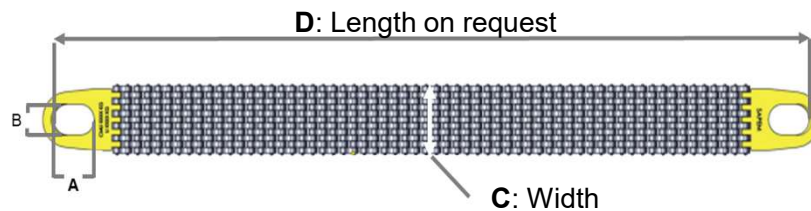

Flat Sling with sliding end fittings: Code 1420

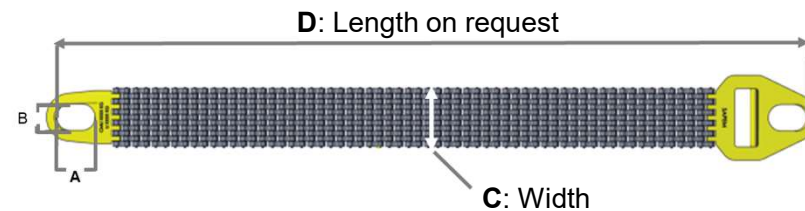

Working load on 1 end, kg	Working load on 2 ends, kg	A mm	B mm	Width C of sling, mm	Length L m	Type	Mass of additional meter kg	with 2 simple end fittings		with 1 simple end fitting and 1 sliding end fitting	
								Mass kg	SAPEM code	Mass kg	SAPEM code
500	1 000	75	50	54	1	PAL 2	1.7	3	1419A	3.8	1420A
750	1 500	75	50	74	1	PAL 3	2.4	3.3	1419B	4	1420B
1 000	2 000	75	50	94	1	PAL 4	3.1	4	1419C	5	1420C
1 250	2 500	90	60	114	1	PAL 5	3.8	5.3	1419D	6	1420D
1 500	3 000	90	60	134	1	PAL 6	4.5	6.6	1419E	7	1420E
1 750	3 500	105	70	154	2	PAL 7	5.3	13	1419F	14	1420F
2 000	4 000	105	70	174	2	PAL 8	6	15	1419G	16	1420G
2 250	4 500	120	80	194	2	PAL 9	6.8	16	1419H	18	1420H
2 500	5 000	120	80	214	2	PAL 10	7.5	19	1419J	21	1420J
2 750	5 500	120	80	234	3	PAL 11	8.3	26	1419K	28	1420K
3 000	6 000	120	80	254	3	PAL 12	9	31	1419L	33	1420L

- **Safety coefficient: 6**
- **Flat slings with steel links do not deform**
- **Safety coefficient: 6**
 - Test at twice the nominal load, by an approved lab

Note: Use and restrictions of use according to the instructions note NI 10057; Equipment meeting the essential requirements of European Directive 2006/42/CE. Supplied with "CE" certificate of conformity.