


# Fixed lifting beam SVT

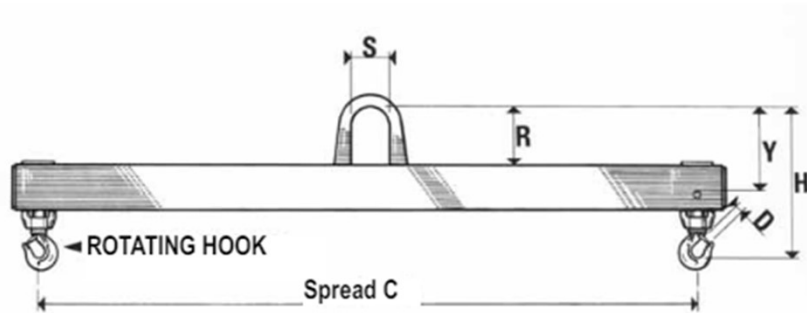

- Double central beam making a box
- Hooks allowing slings with an angle of max 45°
- Safety coefficient 6
- Special models and capacity (force) on request.

| SWL kg | Spread C mm | R mm | S mm | H mm | D  | Mass kg | SAPEM code |
|--------|-------------|------|------|------|----|---------|------------|
| 1 000  | 1 000       | 170  | 120  | 340  | 17 | 35      | 9076A      |
|        | 1 500       |      |      | 360  |    | 45      | 9076B      |
| 2 000  | 1 000       | 215  | 150  | 380  | 22 | 40      | 9076C      |
|        | 1 500       |      |      | 400  |    | 65      | 9076D      |
|        | 2 000       |      |      | 420  |    | 95      | 9076E      |
| 3 000  | 1 000       | 290  | 150  | 470  | 24 | 70      | 9076F      |
|        | 1 500       |      |      | 490  |    | 100     | 9076G      |
|        | 2 000       |      |      | 510  |    | 110     | 9076H      |
|        | 3 000       |      |      | 620  |    | 185     | 9076J      |
| 4 000  | 1 500       | 215  | 150  | 530  | 28 | 120     | 9076K      |
| 5 000  | 1 500       |      |      | 580  | 36 | 135     | 9076L      |
|        | 2 000       |      |      | 600  |    | 170     | 9076M      |
|        | 3 000       | 290  | 710  |      |    | 305     | 9076N      |

*Note: Equipment meeting the essential requirements of European Directive 2006/42/CE and Standard NF EN 13155. Supplied with "CE" certificate of conformity.*