



# RSB system for coil tilting

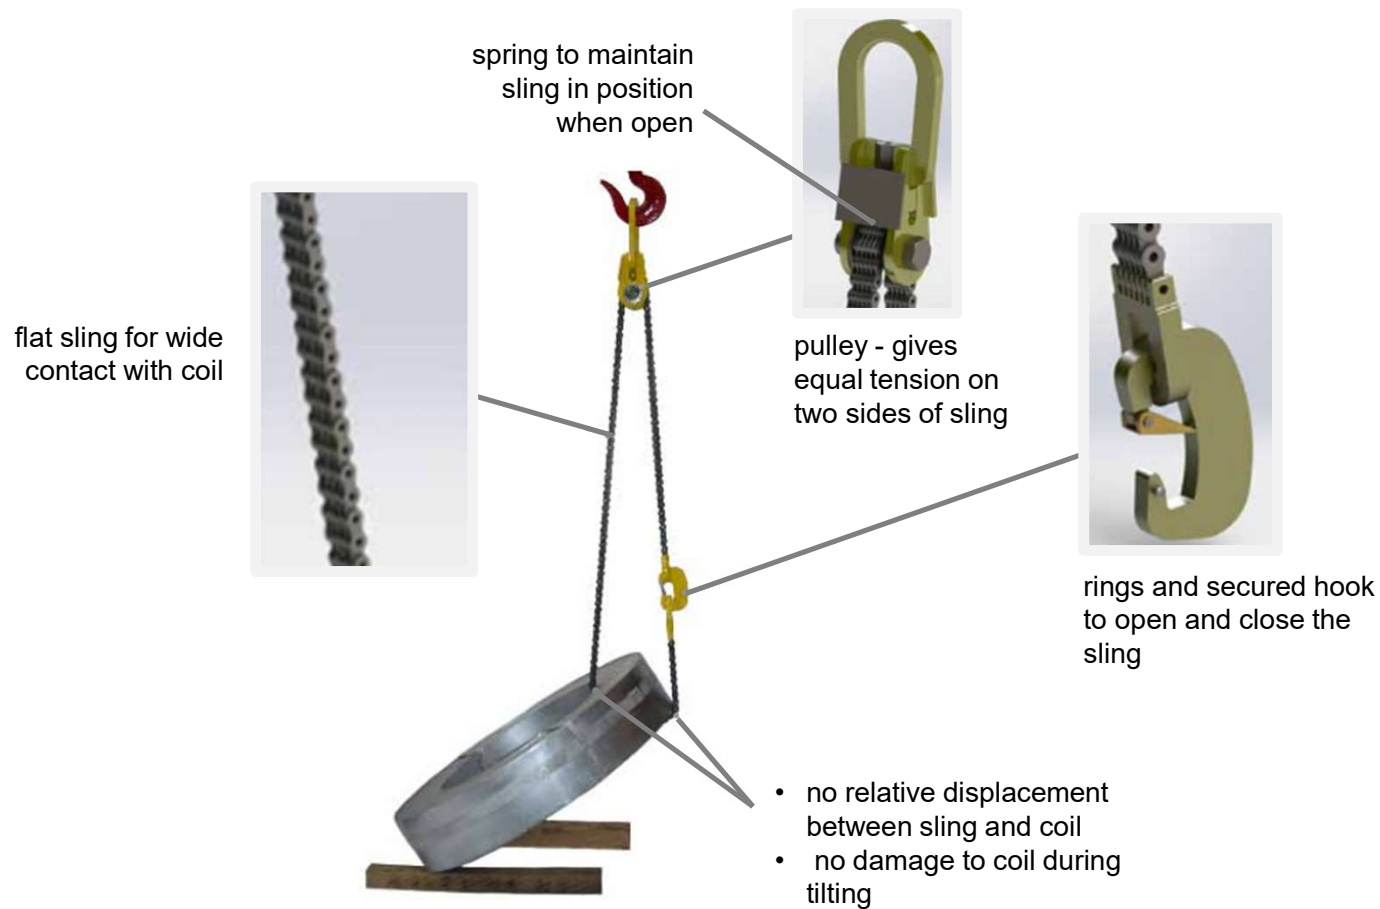

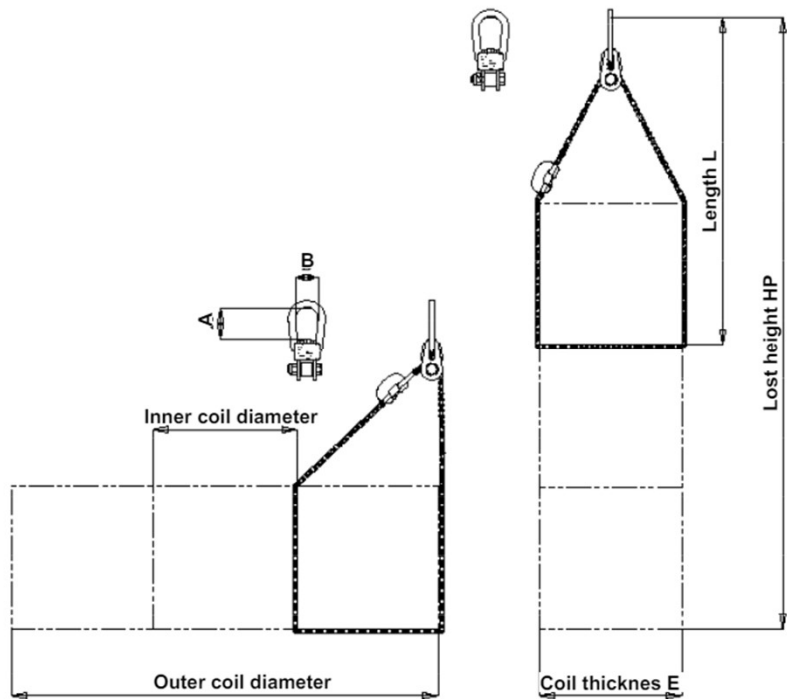

Safety coefficient: 6

Working load kg	A mm	B mm	Width of sling mm	Width of sling connection fitting mm	Thickness of sling connection fitting mm	LD Developed length of sling mm	L mm	Mass kg	SAPEM code
1 000	110	80	36	65	15	1500	1000	11	441A
2 000	110	80	36	65	15	2000	1250	12	441B
3 000	110	80	36	65	15	2500	1500	14	441C
6 000	150	100	45	100	20	3000	1800	30	441D
10 000	170	110	70	120	20	3500	2150	45	441E
15 000	300	200	105	155	20	4000	2500	125	441F
20 000	300	200	140	195	20	4500	2750	150	441G

- Thickness E shall not be more than half outer coil diameter
- Safety factort : 6 (breaking force of system at least 6 times SWL)
- On request : test at twice SWL, by an approved test lab

Use and restrictions of use according to instructions note NI10062

Equipment meeting the essential requirements of European Directive 2006/42/CESupplied with «CE» declaration of conformity